


RESIDENTIAL ENERGY STORAGE SYSTEM



Narada Residential Energy Storage System Solutions

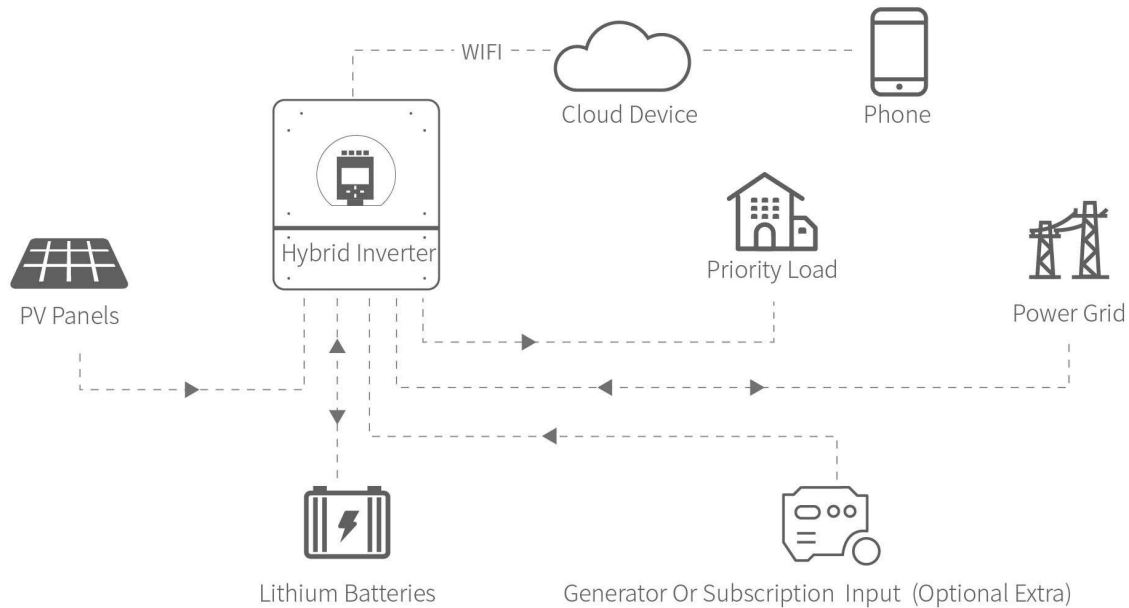

Technical Characteristics

Narada NESR series LFP batteries are widely used in residential energy storage, small UPS system, photovoltaic off-grid base station, etc. It has excellent charge-discharge performance, long service life, high safety and reliability with portable modular installation, which is suitable for 19-inch cabinet or stack installation.



Deep cycling and long service life



Modular design and easy to install



Excellent safety performance



Communication Mode: CAN, RS485



Supporting parallel expansion



Good compatibility and wide application

Specification



Parameters		NESR48100
Nominal Voltage(V)		48
Nominal Capacity(Ah)		100
Nominal Energy(Kwh)		4.8
Discharge Current (A) (Max.)		100
Charge Voltage(V)		54±0.5
Charge Current (A)(Recomm.)		20
Charge Current (A)(Max.)		100
Typical Weight(kg)		40
Dimensions(W*D*H)(mm)		442.5X440X133.5
Status Indicators		SOC/RUN/ALM
Communication Ports		CAN/RS485
Communication In Parallel		16
Switch		Available
Operating Temperature	Discharge	Max.: -20 ~ 60°C,Recommend:10~35°C
	Charge	Max.: 0 ~ 60°C,Recommend:10~35°C
Storage Temperature		0~40°
Humidity		5%~95%
Cycle Life (25°C)		≥6000
IP Level		IP20
Scalability		Up to 76.8kWh (16 groups)

Parallel Expansion



Battery Module	2	3	4	5	6
Energy (kWh)	9.6	14.4	19.2	24	28.8
Voltage Range(V)	40.5~54				
Dimension (W*D*H)mm	442.5*440*304	442.5*440*456	442.5*440*608	442.5*440*760	442.5*440*912
Weight(kg)	82	123	164	205	246
Recommend Charge Current(A)	40	60	80	100	120
Max. Continuous Charge Current(A)	120	150	180	200	210
Max. Continuous Discharge Current(A)	120	150	180	200	210
Note: Supporting up to 6 layers of stacked installation.					